

KeyKeg-K

Technical specifications

GENERAL

Life Cycle
Valve
Product types

DIMENSIONS

Volume
Diameter
Height
Weight (+/-2%)
Residual content

FILLING

Fill before
Suitable for automatic filling
Filling position
Pre-pressure

PHYSICAL-MECHANICAL

Temperature range
Max. dispense pressure
Max. working pressure



10L

20L

30L

Single Use		
KeyKeg		
Beverages		

10L	20L	30L
240 mm		300 mm
330 mm	572 mm	
0.87 kg	0.96 kg	1.39 kg
< 10 ml	< 20 ml	< 20 ml


24 months after production	
Yes	
Upside down	
2.2 bar (± 0.3 bar)	

0-40°C	
4.1 bar	
6.0 bar	

MATERIALS

Gripring	rPP
Outer container (10L)	PET/rPET
Outer container (20 & 30L)	PET
Closure	PA6 r-UBE 19
Valve housing	PP/PE
Inner container	PET/rPET
Bag	PE/PA/Alu/PA
Sleeve	PE
Basecup	rPP

All food contact materials are approved according to regulations FDA 21 CFR 177.1520, EC 1935/2004, EU 10/2011 and/or further amendments.

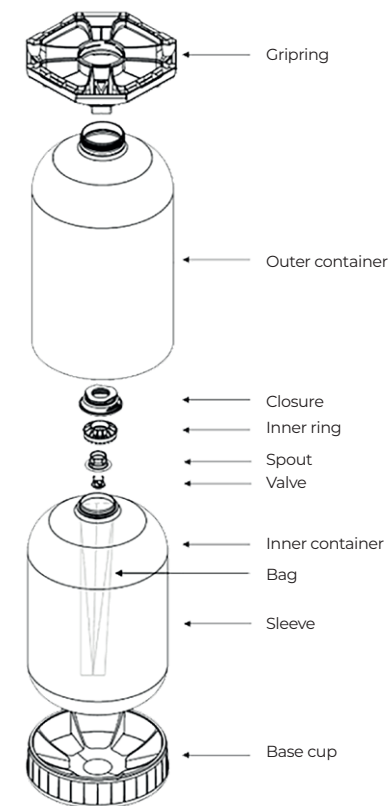

EN 07-2025

